


Ultra T 1.0

HALF-CELL N-TYPE TOPCon
BLACK THRU BIFACIAL DOUBLE-GLASS MODULE
TYPE: STPXXS-C54/Nshtb+



420-450W **23.04%**
POWER OUTPUT MAX EFFICIENCY

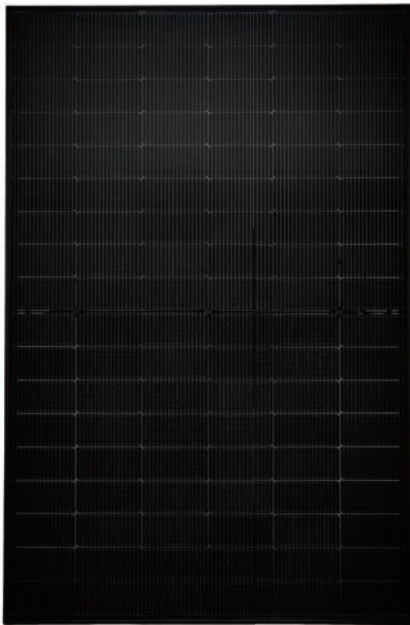

Aesthetic appearance design

Elegant design in all-black appearance, harmonious integration with the components of the building to provide an intense aesthetic experience



Multi busbar technology

Superior optical utilization and current collection capability, effectively improving product power and reliability



Withstand harsh environments

Reliable quality that makes module resistant even to high temperatures, salt water and ammonia



Superior load-bearing capability


Module certified to withstand 5400 Pa front side max static test load and 2400 Pa rear side max static test load



ISO 14001 Environment Management System
ISO 45001 Occupational Health and Safety
ISO 9001 Quality Management System
SA 8000 Social Responsibility Standards
IEC TS 62941 Guideline for Module Design


IEC 61701 Salt-mist certification
IEC 62716 ammonia certification
IEC 60068-2-68 Dust and Sand

30 years of linear warranty
12 years of product warranty

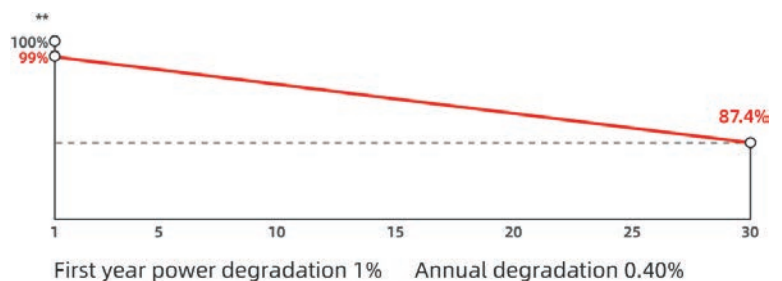

Mechanical Characteristics

Solar Cell	N-type monocrystalline silicon
No. of Cells	108 (6 × 18)
Dimensions	1722 × 1134 × 30 mm
Weight	21.5 kg
Front/Back Glass	2.0 + 2.0 mm semi-tempered glass
Output Cables	4.0 mm ² , (-) 300 mm (+) 300 mm in length or customized length
Junction Box	IP68 rated (3 bypass diodes)
Operating Module Temperature	-40 °C to +85 °C
Maximum System Voltage	1500 V DC (IEC)
Maximum Series Fuse Rating	30 A
Power Tolerance	0 ~ + 3%
Refer. Bifaciality Factor	(80 ± 5)%
Frame	Black anodized aluminum alloy
Packing Configuration	36 pieces per pallet 26/23(US) pallets per container / 40' HQ 936/828(US) pieces per container

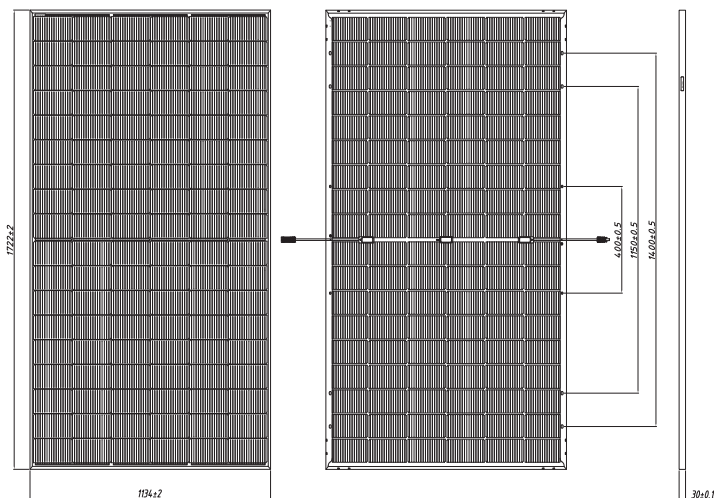

Electrical Characteristics (STC)

Maximum Power (Pmax/W)	450	445	440	435	430	425	420
Optimum Operating Voltage (Vmp/V)	33.10	32.90	32.70	32.50	32.30	32.10	31.90
Optimum Operating Current (Imp/A)	13.60	13.53	13.46	13.39	13.32	13.24	13.17
Open Circuit Voltage (Voc/V)	39.70	39.50	39.30	39.10	38.90	38.70	38.50
Short Circuit Current (Isc/A)	14.33	14.24	14.15	14.07	13.99	13.91	13.83
Module Efficiency (%)	23.04	22.79	22.53	22.28	22.02	21.76	21.51

STC: Irradiance 1000 W/m², module temperature 25 °C, AM=1.5; Measuring tolerance is within +/- 3%;

Electrical Characteristics (BNPI)

Maximum Power (Pmax/W)	499	493	488	482	477	471	465
Optimum Operating Voltage (Vmp/V)	33.10	32.90	32.70	32.50	32.30	32.10	31.90
Optimum Operating Current (Imp/A)	15.07	14.99	14.91	14.84	14.76	14.67	14.59
Open Circuit Voltage (Voc/V)	39.70	39.50	39.30	39.10	38.90	38.70	38.50
Short Circuit Current (Isc/A)	15.88	15.78	15.68	15.59	15.50	15.41	15.32

BNPI: Irradiance front 1000 W/m², rear 135 W/m², module temperature 25 °C, AM=1.5;

Temperature Characteristics

Temperature Coefficient of Pmax	-0.30%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	+0.046%/°C

Information on how to install and operate this product is available in the installation instruction. All values indicated in this data sheet are subject to change without prior announcement. The specifications may vary slightly. All specifications are in accordance with standard EN 50380. Color differences of the modules relative to the figures as well as discolorations of/in the modules which do not impair their proper functioning are possible and do not constitute a deviation from the specification.

Graphs Current-Voltage & Power-Voltage (440W)

