


# Ultra V Pro mini

HALF-CELL N-Type TOPCon  
SINGLE GLASS MONOFACIAL MODULE  
TYPE: STPXXXS-C54/Nshm



**430-450W** **23.0%**  
POWER OUTPUT MAX EFFICIENCY

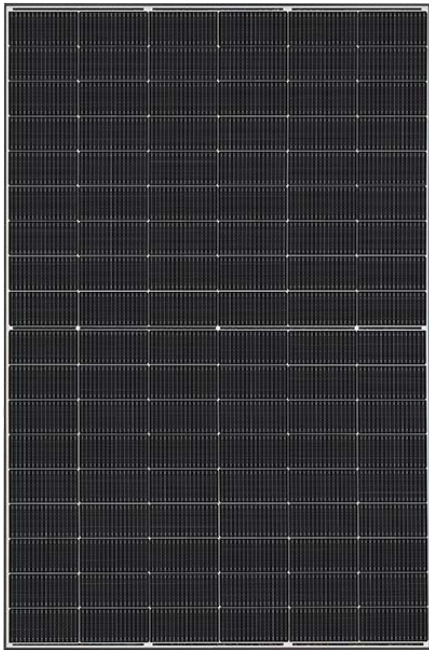

**High module conversion efficiency**  
Module efficiency up to **23.0%** achieved through advanced cell technology and manufacturing process



**Multi busbar technology**  
Superior optical utilization and current collection capability, effectively improving product power and reliability



**Excellent low light performance**  
More power output in low light conditions such as cloudy days, mornings and evenings



**Superior load-bearing capability**  
Module certified to withstand **6000 Pa** front side max static test load and **3800 Pa** rear side max static test load \*




ISO 14001 Environment Management System  
ISO 45001 Occupational Health and Safety  
ISO 9001 Quality Management System  
SA 8000 Social Responsibility Standards  
IEC TS 62941 Guideline for Module Design

IEC 61701 Salt-mist Certification  
IEC 62716 Ammonia Certification  
IEC 60068-2-68 Dust and Sand  
IEC 61730-2 (UL790) Fire Class C



**30** years of linear warranty  
**15** years of product warranty

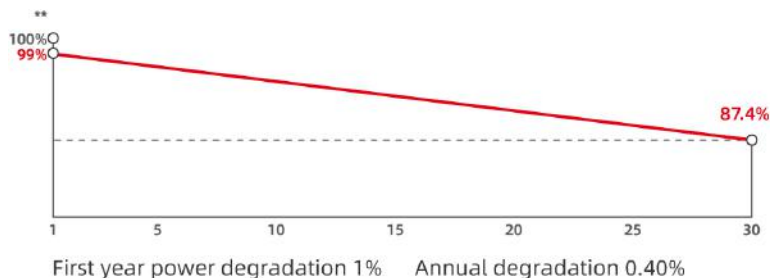

\* Please refer to Suntech Standard Module Installation Manual for details.

\*\* Please refer to Suntech Limited Warranty for details.


\*\*\* WEEE only for EU market.

\*\*\*\* Suntech reserves the right to the final.

# Ultra V Pro STPXXXS-C54/NshM 430-450W

## Mechanical Characteristics

Solar Cell	N-type monocrystalline silicon
No. of Cells	108 (6 × 18)
Dimensions	1722 × 1134 × 30 mm (67.8 × 44.6 × 1.2 inches)
Weight	21.0 kg (46.3 lbs.)
Front Glass	3.2 mm (0.126 inches) fully tempered glass
Output Cables	4.0 mm <sup>2</sup> , (-) 1400mm (+) 1400 mm in length or customized length
Junction Box	IP68 rated (3 bypass diodes)
Operating Module Temperature	-40 °C to +70 °C
Maximum System Voltage	1500 V DC (IEC)
Connectors	STP-XC4(Standard)/ MC4-EVO2(Optional)
Maximum Series Fuse Rating	25 A
Power Tolerance	0/+5 W
Frame	Anodized aluminum alloy frame
Packing Configuration	36 pieces per pallet 936 pieces per container /40'HC 1755×1120×1255 mm per pallet 794 kg per pallet

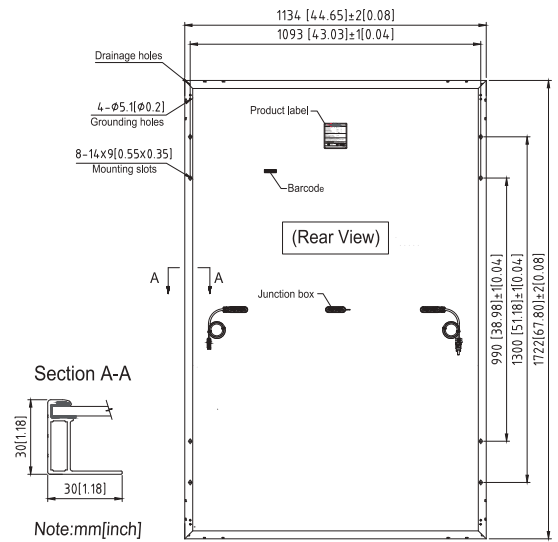

## Electrical Characteristics (STC)

Module Type	STP450S-C54/NshM+	STP445S-C54/NshM+	STP440S-C54/NshM+	STP435S-C54/NshM+	STP430S-C54/NshM+
Maximum Power (P <sub>max</sub> /W)	450	445	440	435	430
Optimum Operating Voltage (V <sub>mp</sub> /V)	33.04	32.87	32.69	32.51	32.33
Optimum Operating Current (I <sub>mp</sub> /A)	13.62	13.54	13.46	13.38	13.30
Open Circuit Voltage (V <sub>oc</sub> /V)	39.24	39.11	38.98	38.85	38.72
Short Circuit Current (I <sub>sc</sub> /A)	14.57	14.49	14.41	14.33	14.25
Module Efficiency (%)	23.0	22.8	22.6	22.3	22.1

STC: Irradiance 1000 W/m<sup>2</sup>, module temperature 25 °C, AM=1.5; Measuring tolerance is within +/- 3%;

## Temperature Characteristics

Temperature Coefficient of P <sub>max</sub>	-0.29%/°C
Temperature Coefficient of V <sub>oc</sub>	-0.25%/°C
Temperature Coefficient of I <sub>sc</sub>	0.046%/°C

Information on how to install and operate this product is available in the installation instruction. All values indicated in this data sheet are subject to change without prior announcement. The specifications may vary slightly. All specifications are in accordance with standard EN 50380. Color differences of the modules relative to the figures as well as discolorations of/in the modules which do not impair their proper functioning are possible and do not constitute a deviation from the specification.

## Graphs Current-Voltage & Power-Voltage Curve (445W)

